





# NEOFLEX™ HIGH GRADE INTERLOCKING RUBBER MAT (10MM THICKNESS)

SKU: NEOFLEX-10


Border

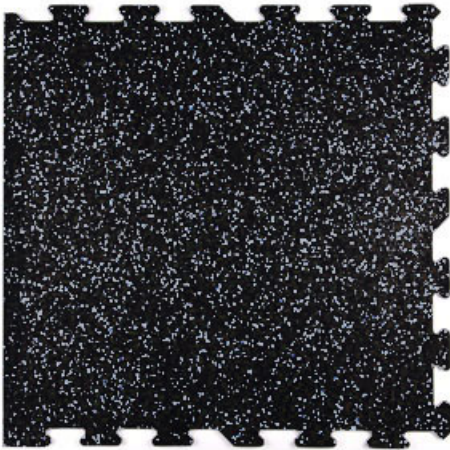

Center

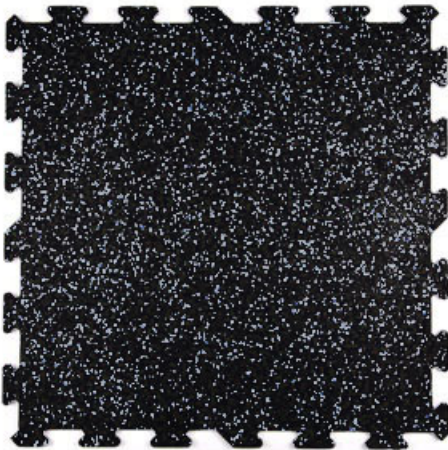

Corner

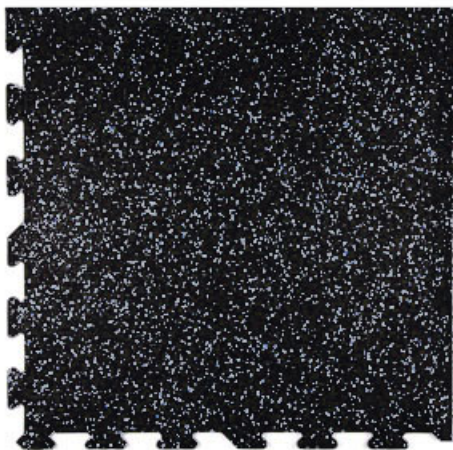



## PRODUCT DESCRIPTION

Neoflex™ High Grade mat is a new addition to the Neoflex interlock family. It is composed of **100% EPDM Rubber**, making it more lasting and odourless as compared to recycled rubber. It is ideally suited for fitness gyms, changing rooms, waiting rooms, walkways, exhibitions or temporary facilities.

Installation not provided.

- Commercial, Recreational Flooring
- Simple And Easy Self Installation,
- 100% Synthetic Black with white specks EPDM Rubber
- Compliant to ASTM D2859, Class 1
- Complaint to EN 13501-1, Class Efl
  - HALOGEN FREE
  - FORMALDEHYDE FREE
  - PVC FREE

## Area of Application

Fitness Gyms - Aerobics - Changing Rooms - Pool Surrounds - Offices - Entrances - Retail Areas - Auditoria - Corridors - Stadia - Cinemas - Buses - Trains

## SPECIFICATIONS - NEOFLEX™ 500 SERIES

Property	Standard	Result
Thickness		10 mm
Square Tile Size		52 x 52cm
Interlock Size		50 x 50cm
Density		1,000 kg/m3 [62.34 lbs./cu.ft.]
Resilience	DIN 18032	49%
Tensile Strength	DIN 18032	1.39 N/mm2
Tear Strength	ASTM D624	9.7 N/mm
Taber Abrasion	ASTM C504	0.53 gr
Shore Hardness A	ASM D2240	60m
Remaining Indentation	DIN 53960	0.07mm
Noise Absorption	EN 20140/ISO 140	18dB [10 mm]
Flammability	ASTM D2859	Class 1 [Sport Use]
Flammability	ASTM E648	Class 2 [Commercial Use]
Coefficient of Friction	ASTM D2047-97	Dry > 1.2, Wet > 1.2
Slip Resistance	ANZS 4596:1999	R10
Thermal Stability	ASTM C1026	-40°C - 100°C



Neoflex Rubber Flooring is made of direction free rubber chips supplied in a variety of sizes and colors. Variations in shading and dispersion is normal.

ADDITIONAL  
INFORMATION

More Information

Warranty

6 months