




NEOFLEX™ 500 SERIES INTERLOCKING RUBBER MAT (12MM THICKNESS)



SKU: NEOFLEX


Border

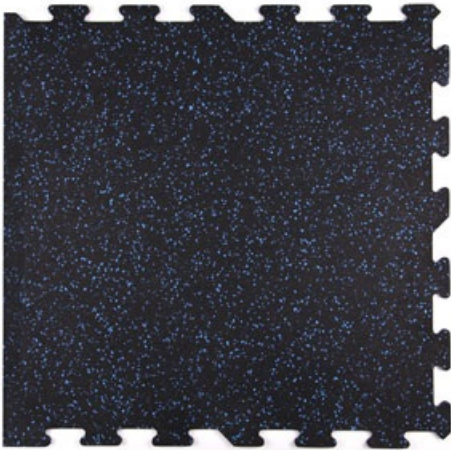

Center



Corner

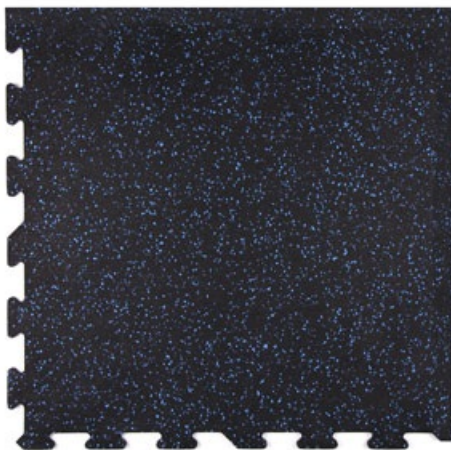



PRODUCT DESCRIPTION

Neoflex™ 500 Series is soft yet durable. It is composed of 80% SBR Rubber with 20% Mixed Colored EPDM Rubber, making it an appealing yet very cost effective flooring solution available in a vast variety of colors. It is ideally suited for fitness gyms, changing rooms, waiting rooms, walkways, exhibitions or temporary facilities.

Installation not provided.

- Commercial, Recreational Flooring
- Simple And Easy Self Installation,
 - 80% Recycled Black Rubber,
- 20% Synthetic Blue Colored EPDM Rubber
 - Compliant to ASTM D2859, Class 1
 - Complaint to EN 13501-1, Class Efl
 - HALOGEN FREE
 - FORMALDEHYDE FREE
 - PVC FREE

Area of Application

Fitness Gyms - Aerobics - Changing Rooms - Pool Surrounds - Offices - Entrances - Retail Areas - Auditoria - Corridors - Stadia - Cinemas - Buses - Trains

SPECIFICATIONS - NEOFLEX™ 500 SERIES

Property	Standard	Result
Thickness		12 mm
Square Tile Size		52 x 52cm
Interlock Size		50 x 50cm
Density		1,000 kg/m3 [62.34 lbs./cu.ft.]
Resilience	DIN 18032	49%
Tensile Strength	DIN 18032	1.39 N/mm2
Tear Strength	ASTM D624	9.7 N/mm
Taber Abrasion	ASTM C504	0.53 gr
Shore Hardness A	ASM D2240	60m
Remaining Indentation	DIN 53960	0.07mm
Noise Absorption	EN 20140/ISO 140	18dB [10 mm]
Flammability	ASTM D2859	Class 1 [Sport Use]
Flammability	ASTM E648	Class 2 [Commercial Use]
Coefficient of Friction	ASTM D2047-97	Dry > 1.2, Wet > 1.2
Slip Resistance	ANZS 4596:1999	R10
Thermal Stability	ASTM C1026	-40°C - 100°C



Neoflex Rubber Flooring is made of direction free rubber chips supplied in a variety of sizes and colors. Variations in shading and dispersion is normal.

ADDITIONAL
INFORMATION

More Information

Warranty

6 months