





NEOFLEX™ 500 SERIES INTERLOCKING RUBBER MAT (12MM THICKNESS)

SKU: NEOFLEX


Border

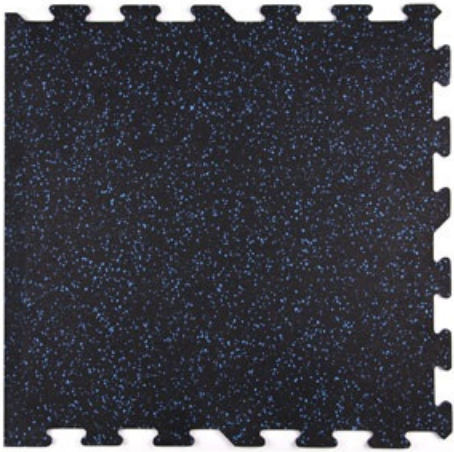

Center

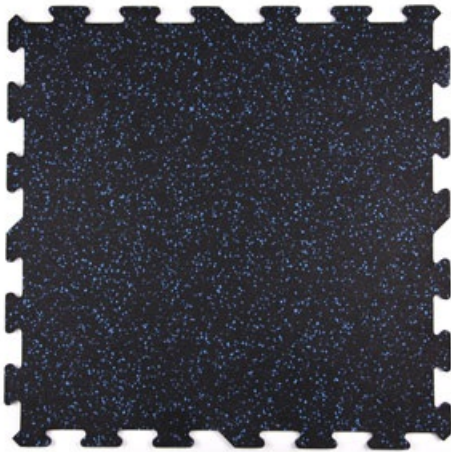

Corner

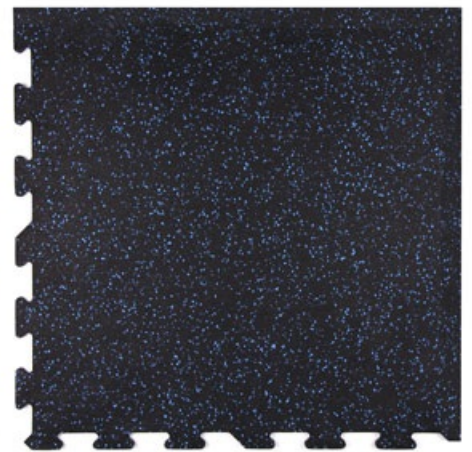



PRODUCT DESCRIPTION

Neoflex™ 500 Series is soft yet durable. It is composed of 80% SBR Rubber with 20% Mixed Colored EPDM Rubber, making it an appealing yet very cost effective flooring solution available in a vast variety of colors. It is ideally suited for fitness gyms, changing rooms, waiting rooms, walkways, exhibitions or temporary facilities.

- Commercial, Recreational Flooring
- Simple And Easy Self Installation,
 - 80% Recycled Black Rubber,
- 20% Synthetic Blue Colored EPDM Rubber
 - Compliant to ASTM D2859, Class 1
 - Complaint to EN 13501-1, Class Efl
 - HALOGEN FREE
 - FORMALDEHYDE FREE
 - PVC FREE

Area of Application

Fitness Gyms - Aerobics - Changing Rooms - Pool Surrounds - Offices - Entrances - Retail Areas - Auditoria - Corridors - Stadia - Cinemas - Buses - Trains

SPECIFICATIONS - NEOFLEX™ 500 SERIES

Thickness	12 mm	
Square Tile Size	52 x 52cm	
Interlock Size	50 x 50cm	
Density	1,000 kg/m3 [62.34 lbs./cu.ft.]	
Resilience	49%	DIN 18032
Tensile Strength	1.39 N/mm2	DIN 18032
Tear Strength	9.7 N/mm	ASTM D624
Taber Abrasion	0.53 gr	ASTM C504
Shore Hardness A	60	ASM D2240
Remaining Indentation	0.07mm	DIN 53960
Noise Absorption	18dB [10 mm]	EN 20140/ISO 140
Flammability	Class 1 [Sport Use]	ASTM D2859
Flammability	Class 2 [Commercial Use]	ASTM E648
Coefficient of Friction	Dry > 1.2, Wet > 1.2	ASTM D2047-97



Slip Resistance	R10	ANZS 4596:1999
Thermal Stability	-40°C - 100°C	ASTM C1026
	Neoflex Rubber Flooring is made of direction free	
	rubber chips supplied in a variety of sizes and	
	colors. Variations in shading and dispersion is	
	normal.	

ADDITIONAL
INFORMATION

More Information

Warranty

6 months