




# NEOFLEX™ PREMIUM GYM TILES

SKU: NEOFLEX-PGT



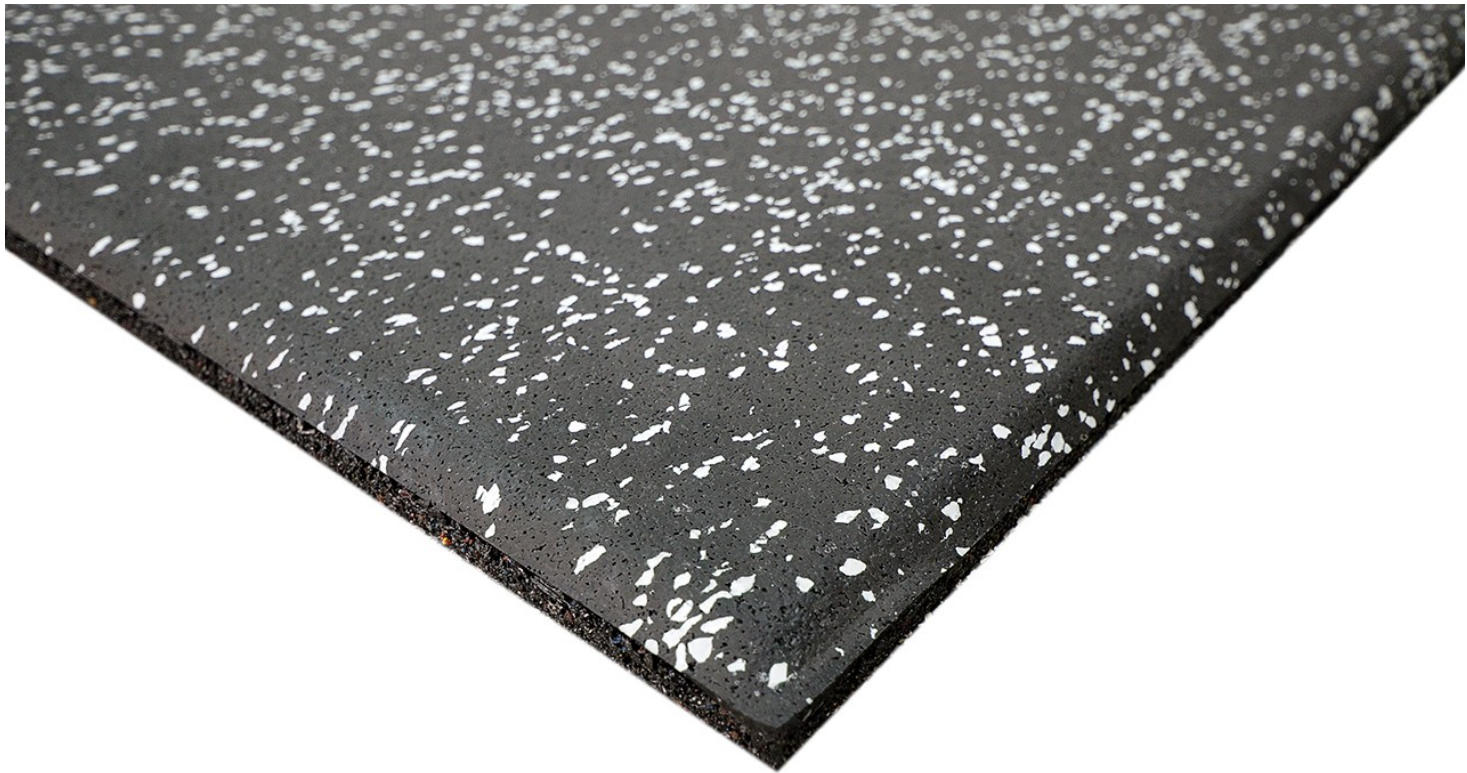

PRODUCT DESCRIPTION

These 15 mm x 1m x 1m rubber tiles are easily installed and are a cost effective choice for a very tough, sound deadening, anti-vibration and comfortable tile surface is preferred. For an indoor setting, you can loose lay them or bond them down using the 4 x Stikibak tabs provided on the back. These tiles are used for the official competition floor of some of Europe's largest CrossFit events like The German Throwdown.

**Specs:**

Property	Standard	Result
Thickness		15 mm
Dimensions		1010 mm x 1010 mm
Weight		15.0 kgs
Shore Hardness A		60°
Resilience	ASTM D 2240	40%
Tear Strength Top Layer	ASTM D 624	1.55 MPa (± 225 psi)
Tear Strength Base layer	ASTM D 624	0.70 MPa (± 101 psi)
Taber Abrasion	ASTM C 504	0.66 gr
Remaining Indentation	DIN 53960	0.05 mm
Flammability	EN 13501-1	Class Cf1-s1
	ASTM E648	Class I [4.4 kW/m2]
Coefficient of Friction	ASTM D 2047-97	Dry: 1.03 Wet: 0.97

ADDITIONAL INFORMATION

More Information

**Product Dimension**

101 x 101cm

**Warranty**

6 months

**Tier Price for Specific customer**

[ ]