


SKU: NEOFLEX-PGT-B

HOMEGYM



NEOFLEX

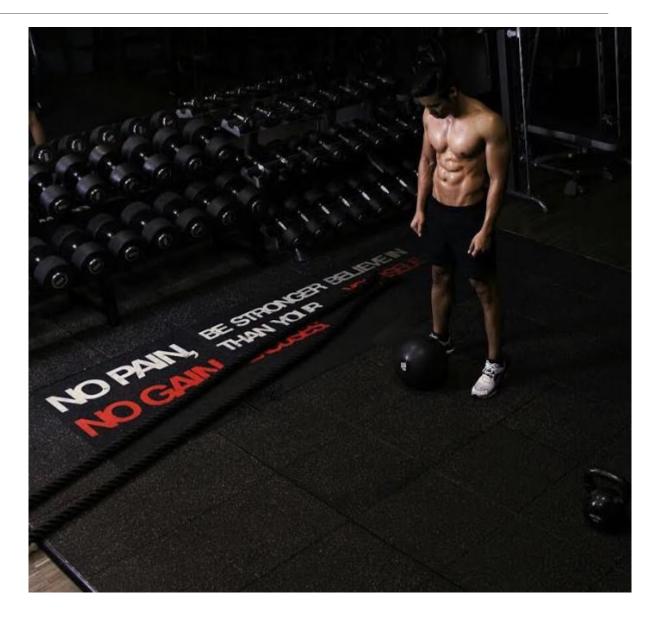

PRODUCT DESCRIPTION

These 15 mm x 1m x 1m rubber tiles are easily installed and are a cost effective choice for a very tough, sound deadening, anti-vibration and comfortable tile surface is preferred. For an indoor setting, you can loose lay them or bond them down using the 4 x Stikibak tabs provided on the back. These tiles are used for the official competition floor of some of Europe's largest CrossFit events like The German Throwdown.

Property Standard Result Thickness 15 mm Dimensions 1010 mm x 1010 mm Weight 15.0 kgs Shore Hardness A 60º Resilience ASTM D 2240 40% ASTM D 624 Tear Strength Top Layer 1.55 MPa (± 225 psi) Tear Strength Base layer ASTM D 624 0.70 MPa (± 101 psi) Taber Abrasion ASTM C 504 0.66 gr **Remaining Indentation** DIN 53960 0.05 mm Class Cfl-s1 EN 13501-1 Flammability ASTM E648 Class I [4.4 kW/m2] Coefficient of Friction ASTM D 2047-97 Dry: 1.03 Wet: 0.97

Specs:

ADDITIONAL